

Experiments with Podded Propulsors in Static Azimuthing Conditions

Islam M. F¹, Veitch B¹, Akinturk A², Bose N³ and Liu P²

¹*Faculty of Engineering and Applied Science, Memorial University of Newfoundland
St. John's, NL, A1B 3X5, Canada*

²*Institute for Ocean Technology, National Research Council Canada
St. John's, NL, A1B 3T5, Canada*

³*Australian Maritime Hydrodynamics Research Centre, Australian Maritime College, Launceston, TAS
7250, Australia*

Email: Mohammed.Islam@nrc-cnrc.gc.ca

ABSTRACT

The paper presents a comprehensive experimental study of the variations of propulsive characteristics of puller and pusher podded propulsors in static azimuthing open water conditions. A custom designed six-component global dynamometer and a three-component pod dynamometer were used to measure the propulsive performance of a podded unit in pusher and puller configurations in a towing tank. The unit was tested to measure the forces on the whole unit in the three co-ordinate directions as well as thrust and torque of the propeller for a range of advance coefficients combined with the range of static azimuthing angles from +30° to -30° with 5° and 10° increments. The variations in propulsive performance of the unit with change of azimuthing angle and advance speed in the two configurations were examined. The results of the measurements are presented as changes of forces and moments of the propulsor unit with advance coefficients and azimuthing angles. The results illustrate that the axial and side forces and the steering moment are complex functions of the azimuthing angles both for puller and pusher propulsors.

1. INTRODUCTION

Podded propulsors have become a popular main propulsion system. It is accepted that a podded propulsor allows more flexibility in design of the internal arrangement of a ship, potentially reduced noise and vibration, and increased maneuverability, especially in a confined space [1].

Szantyr ([14] and [15]) published one of the first sets of systematic experimental data on podded propulsors as the main propulsion unit with static

azimuth angles. The tests measured the axial and transverse loads and used traditional non-dimensional coefficients to analyze the data. The study was limited to $\pm 15^\circ$ azimuth angles. In the work, the effect of an azimuth angle on propeller torque was not studied. Grygorowicz and Szantyr [16] presented open-water measurements of podded propulsors both in puller and pusher configurations in a circulating water channel. Heinke [17] reported systematic model test results with a 4- and 5-bladed propeller fitted to a generic pod housing in pull- and push-mode. In the report, Heinke presented systematic data for forces and moments on the propeller and pod body at different static azimuth angles. Stettler *et al.* [18] also investigated the dynamics of azimuth podded propulsor forces with emphasis on the application of nonlinear vehicle maneuvering dynamics.

In a study of podded propulsor failures, bearing failure was identified as one of the most significant causes of mechanical failure of the propulsors [19]. Detailed study on the bearing forces and moments due to the rotation of the propeller and the azimuthing of pod unit is required to provide sufficient information to the bearing designer to obtain optimum designed bearing.

A research program on podded propellers has been undertaken jointly by the Ocean Engineering Research Centre (OERC) at Memorial University of Newfoundland (MUN), the National Research Council's Institute for Ocean Technology (IOT), Oceanic Consulting Corporation, and Thordon Bearings Inc. The program combines parallel developments in numerical prediction methods and experimental evaluation. Amongst the hydrodynamic issues that have been identified are questions

regarding the effects of hub taper angle ([2]-[7]), pod-strut configuration ([2], [7]), pod-strut interactions ([8] and [9]), gap pressure [10], and pod-strut geometry ([11]-[13]) on podded propeller performance. The present study focuses on the variations of propulsive performance of pusher and puller podded propulsors at various static azimuthing conditions under open water operating conditions.

The present study on the azimuth conditions aims to improve the understanding of the behavior of forces and moments that act on the pods. Specifically, the study quantifies the relationship between azimuth conditions and bearing loads (forces and moments on pod bearings). Section 2 details the geometry of the propeller and pod-strut models used in this study and a brief description of the apparatus and testing techniques used. Experimental results and discussions are provided in section 3, followed by conclusions in section 4.

2. EXPERIMENTAL SET-UP

2.1 Pod Model

The experiments included tests on two model propellers with a pod unit consisting of a combination of a pod shell and a strut. The propellers had identical blade section geometry but different hub taper angles of 15° and -15° (namely, Push+ 15° and Pull- 15° , respectively). The Pull- 15° propeller was a left-handed propeller and the Push+ 15° propeller was a right-handed propeller. Opposite taper angles were used in the conical hubs of the propellers to fit them with the same pod and strut shell in pusher and puller configurations. The propellers were four bladed with a diameter, D of 0.27m, pitch-diameter ratio (P/D) of 1.0 and expanded area ratio (EAR) of 0.6. The geometric particulars of the propellers are given in [20].

The geometric particulars of the pod-strut model were defined using the parameters depicted in Figure 1. The values for the model propulsor were selected to provide an average representation of in-service, full-scale single screw podded propulsors. The particulars of the pod-strut body tested are shown in Table 1.

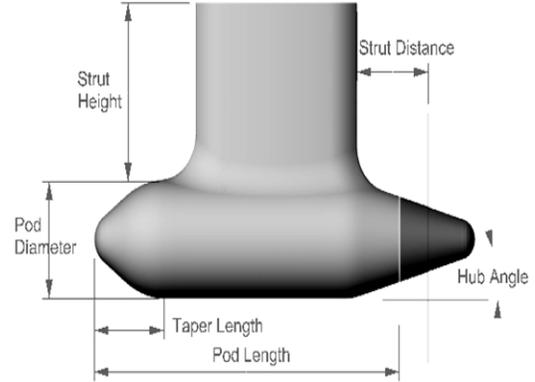


Figure 1. Geometric parameters used to define pod-strut geometry.


<i>External Dimensions of Model Pods</i>	Pod 1 mm
Propeller Diameter, D_{Prop}	270
Pod Diameter, D_{Pod}	139
Pod Length, L_{Pod}	410
Strut Height, S_{Height}	300
Strut Chord Length	225
Strut Distance, S_{Dist}	100
Strut Width	60
Fore Taper Length	85
Fore Taper Angle	15°
Aft Taper Length	110
Aft Taper Angle	25°

Table 1. Geometric particulars of the pod-strut model.

2.2 Experimental Apparatus and Approach

The open water tests of the pod in straight course and azimuth conditions were performed in accordance with the ITTC recommended procedure, Podded Propulsor Tests and Extrapolation, 7.5-02-03-01.3 [21], and the description provided by Mewis [22]. A custom-designed dynamometer system [10] was used to measure propeller thrust, torque, and unit forces and moments. In the instrumentation, a motor fitted above the propeller boat drove the propeller via a belt system.

The center of the propeller shaft was $1.5D_{Prop}$ below the water surface. A boat shaped body called a wave shroud was attached to the frame of the test equipment and placed just above the water surface. The bottom of the shroud stayed 3 to 5 mm above the water surface to suppress waves caused by the strut piercing the surface. The part of the shaft above the strut (the shaft connected the pod unit to the main drive of the equipment) went through the shroud. Water temperature, carriage speed, V , and the rotational speed of the propeller, n , were also measured. Figure 2 shows the different parts of the experimental apparatus.

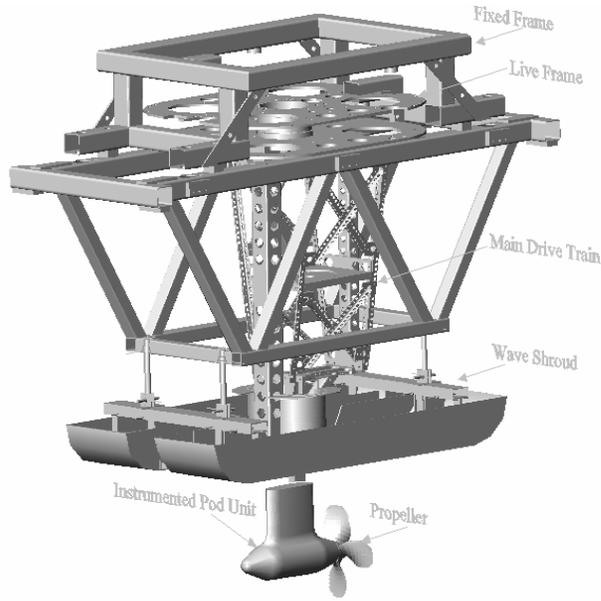

(a) the pod dynamometer system [10].



(b) motor that runs the propeller with the gearbox



(c) global dynamometer looking from below.



(d) top view of the arrangement used in the lifting system.



(e) propeller and the pod enclosing the pod dynamometer

Figure 2. Different parts of the experimental apparatus used in the podded propulsor tests.

As shown in Figure 2(a), the dynamometer system has two major parts. The first part is the pod dynamometer, which measures the thrust and torque of the propeller at the propeller shaft. The second part of the system is the global dynamometer, which measures the unit forces in three coordinate directions at a location above the wave shroud. Further details of the experimental apparatus are presented by MacNeill *et al.* [10]. The propulsor was placed at different static azimuthing conditions by rotating the entire lower part of the instrumentation (instrumented pod unit and the main drive as shown in Figure 2(a)). The entire lower part hung on a round plate, which had machined marks that defined the azimuth angles.

The pod unit was tested in the puller configuration at different static azimuthing conditions (from 30° on the port side to -30° on the starboard side in increments of 5° and 10°). The propeller, Pull-15 was used in these tests. The entire instrumentation was then set up in reverse conditions to obtain the pusher configuration propulsor by replacing the Pull-15 propeller with the Push+15 one. Similar experiments were carried out in this configuration.

3. RESULTS AND DISCUSSIONS

The pod dynamometer system can measure propeller and pod forces and moments, namely: propeller thrust (T_{Prop}), propeller torque (Q), unit axial/longitudinal force (F_x) and moment (M_x), unit side/transverse force (F_y) and moment (M_y), and unit vertical force (F_z) and moment (M_z).

For the study of the effects of azimuthing conditions, the measurements were done in puller and pusher configurations using Pod 1 at eleven different azimuth angles. The global dynamometer was calibrated using the method as described by Hess *et al.* [23] and Galway [24]. The methods take into account cross talk between the six load cells and produce an interaction matrix to convert the voltage output into the forces and moments in the three coordinate directions. The definition of the forces, moments and co-ordinates that were used to analyze the data and present the results is shown in Figure 3. The coordinate centre coincided with the intersection of the horizontal axis through the propeller shaft centre and the vertical axis through the strut shaft center. In the present paper, only the unit forces and moments are presented in the form of traditional non-dimensional coefficients as defined in Table 2.

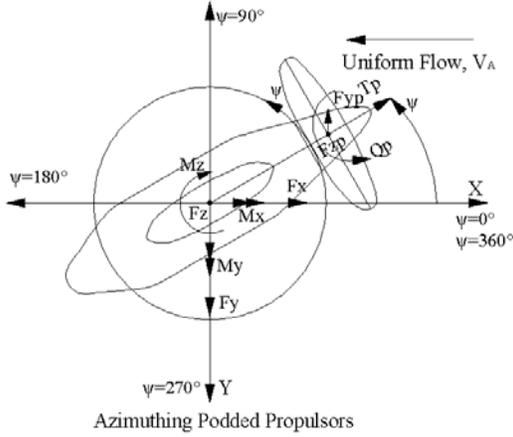


Figure 3. Definitions of forces, moments, coordinates of a puller azimuth podded propulsor.

Performance Characteristics	Data Reduction Equation
$K_{T_{Unit}}$ - unit thrust coefficient, K_{TX} or Longitudinal force coefficient, K_{FX}	$T_{Unit} / \rho n^2 D^4$ or $F_X / \rho n^2 D^4$
$10K_Q$ - propeller torque coefficient	$10Q / \rho n^2 D^5$
J - propeller advance coefficient	V_A / nD
η_{Unit} - unit efficiency	$J / 2\pi \times (K_{T_{Unit}} / K_Q)$
K_{FY} - transverse force coefficient	$F_Y / \rho n^2 D^4$
K_{FZ} - vertical force coefficient	$F_Z / \rho n^2 D^4$
K_{MX} - moment coefficient around x axis	$M_X / \rho n^2 D^5$
K_{MY} - moment coefficient around y axis	$M_Y / \rho n^2 D^5$
K_{MZ} - moment coefficient around z axis (steering moment)	$M_Z / \rho n^2 D^5$
T_{Unit} - unit thrust	D - propeller diameter
Q - propeller torque	n - propeller rotational speed
V_A - propeller advance speed, in the direction of carriage motion	$F_{X,Y,Z}$ - components of the hydrodynamic force on the pod

It should be noted that, propeller advance coefficient, J was defined using the propeller advance speed, V_A in the direction of carriage motion (in the direction of X in the inertia frame), not in the direction of the propeller axis.

Table 2. List of performance coefficients for the podded propulsor unit.

The performance coefficients of the propulsor in puller/pusher configuration at different azimuth

conditions are influenced by the hub geometry, propeller rotation direction and the interaction with the pod-strut housing. The interaction effect is essentially because of the heterogeneous (chaotic) flow distribution in the propeller plane, induced by the propeller blades, strut and pod housing. The difference in the pod-strut combinations (pusher and puller), means that the flow conditions over the propulsor are very different in the two configurations and this necessitates separate study.

The details of uncertainty analysis of the experimental apparatus are not discussed here. To assess the uncertainty in each set of experiments and to identify the major factors influencing these results, a thorough uncertainty analysis was conducted and presented by Taylor [25] and Islam [26].

3.1 Unit Performance in Puller Configuration

The axial/unit force coefficient, propeller torque coefficient and unit efficiency, side/transverse forces and vertical (steering) moment coefficients of Pod 1 for the range of advance coefficients and azimuth angles tested are presented in Figures 10 to 14. The longitudinal force coefficients, K_{TX} (also called the unit thrust coefficient, $K_{T_{Unit}}$) decreased as the advance coefficient increased (see Figure 10). As the azimuth angle was increased from 0° to 30° or from 0° to -30° , the unit thrust coefficient, K_{TX} decreased. An exception was found when the azimuth angle was changed from 0° to 10° (Port side) where a small increase in unit thrust coefficient was seen for most of the advance coefficient values (Figure 14a). The reduction of the unit thrust was stronger for the negative azimuth direction, i.e. for the left hand propeller, the clockwise azimuth direction (in the present case, the -10° , -20° and -30° azimuth conditions, see Figure 14a).

Figure 11 shows that the torque coefficient remained approximately the same for 30° (Port) and -30° (Starboard) static azimuth angles. The same conclusion applies for other azimuthing conditions in the two opposite angular positions at all advance coefficient values, with a few exceptions, which might be attributed to experimental uncertainty. Figure 14b shows the variation of propeller torque with the azimuthing angles at different advance coefficients as indicated in the legends (e.g. for the key, J020 means at $J=0.20$). The propeller torque was not changed much with the change of azimuthing conditions at low advance coefficient values ($J < 0.40$). For higher advance coefficients, the torque coefficient increased with the increase of azimuthing angles (both in positive and negative directions).

The unit efficiency was the lowest at -30° azimuthing conditions and the highest unit efficiency was seen at 5° (port) azimuthing angles for all advance coefficient values (Figure 12). The results also showed that, as the azimuth angles changed from 0° to $+30^\circ$ or from 0° to -30° , the increases/decreases of unit thrust, propeller torque and unit efficiency were nonlinear with the change of azimuth angles.

Figures 13 and 14c show the change of transverse force coefficients with advance coefficient and azimuth angles (at different fixed J s). The propulsor showed an increase of transverse force with both positive and negative azimuth angles but in opposite directions with the increase in J . Zero transverse force was found in the range of azimuth angles from 2° to 5° (counter-clockwise azimuth) for all of the advance coefficients. The steering moment (vertical moment about z -axis) showed a decreasing tendency with the increase of advance coefficients for positive azimuthing angles and an increasing tendency with the increase in advance coefficients for negative azimuthing angles with a steady behavior for straight course conditions.

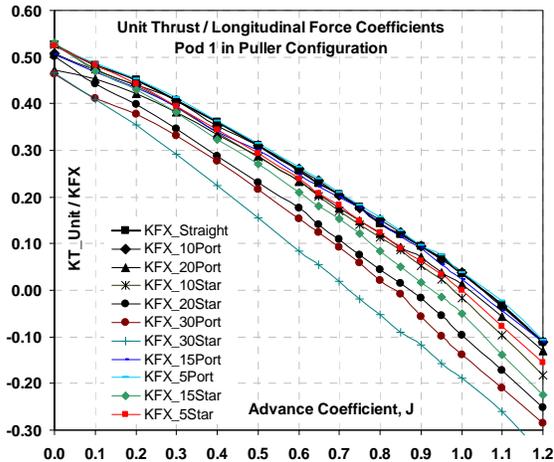


Figure 10. Longitudinal force coefficient plots for Pod 1 at different azimuth conditions.

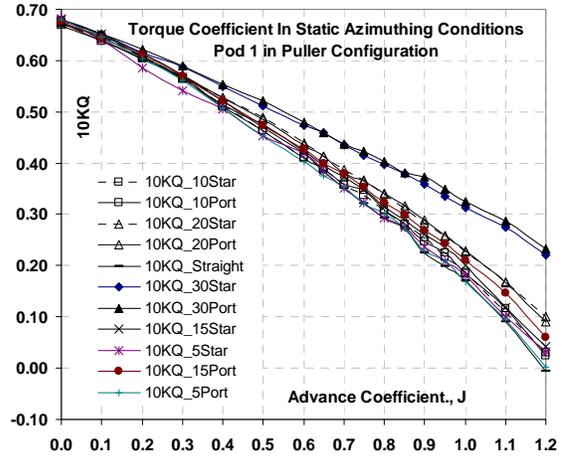


Figure 11. Propeller torque coefficient for Pod 1 unit at different azimuth condition.

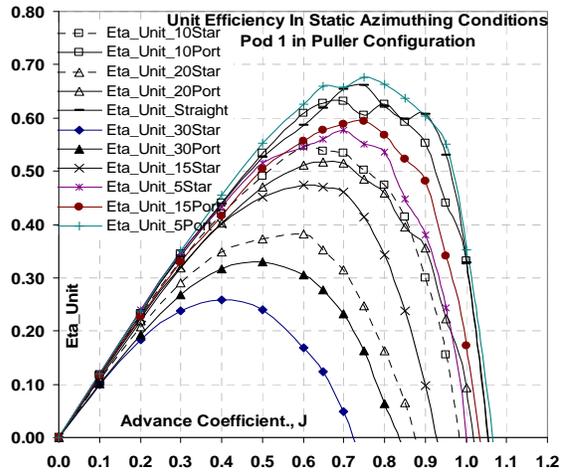


Figure 12. Unit efficiency plots for Pod 1 at different azimuth conditions.

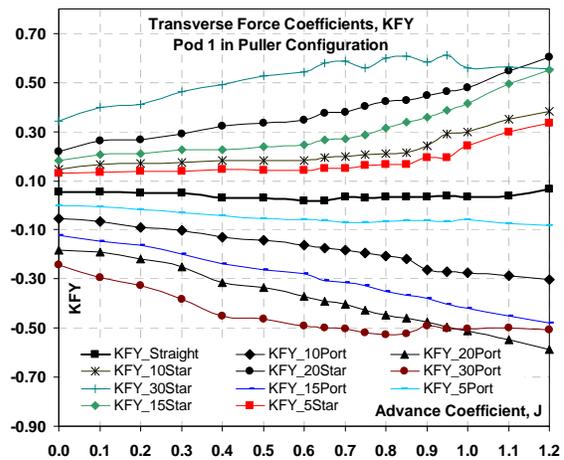


Figure 13. Transverse force coefficient plots for Pod 1 at different azimuth conditions.



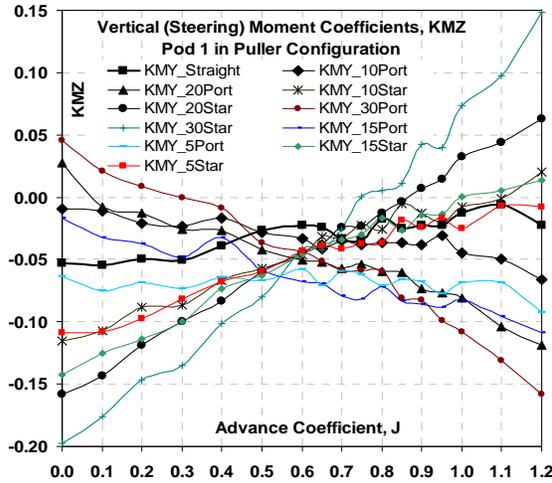



Figure 14. Vertical (steering) moment coefficient plots for Pod 1 at different azimuth conditions.

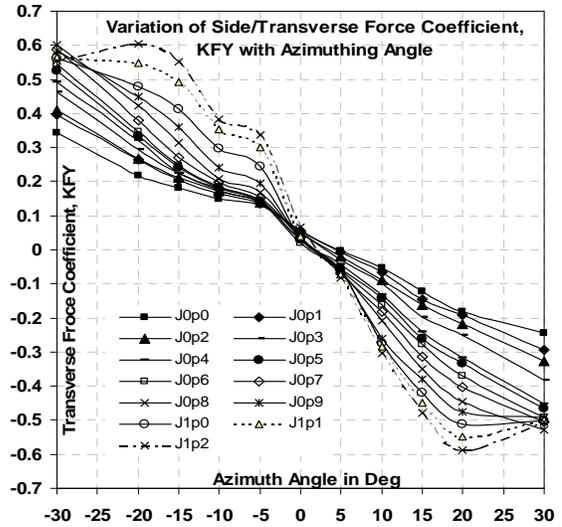

14(c) Transverse / Side force coefficient

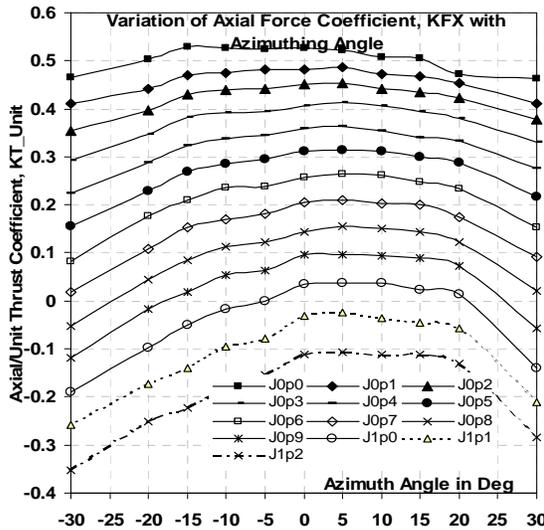

14(a) Unit Thrust / Longitudinal force coefficient

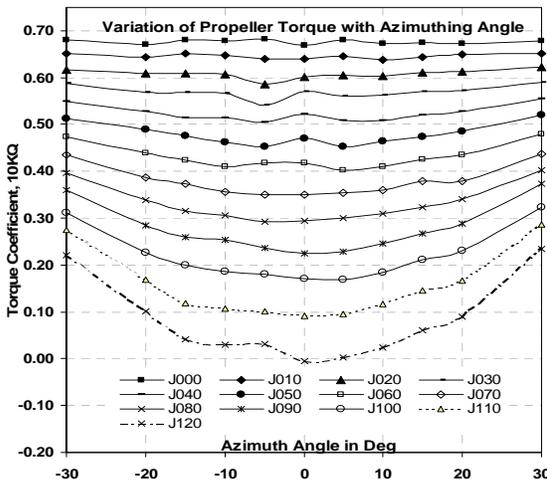

14(b) Propeller torque coefficients

3.2 Unit Performance in Pusher Configuration

After the experiments were conducted in puller configurations, the entire instrumentation was reversed to obtain a set-up in pusher configuration, the Pull-15° propeller being replaced by the Push+15° one. The test results in the configuration are presented in the form of axial/unit force coefficient, propeller torque coefficient and unit efficiency, side/transverse forces and vertical (steering) moment coefficients of Pod 1 for the range of advance coefficients and azimuth angles tested as shown in Figures 15 to 20.

The unit thrust coefficients, K_{TX} behaved somewhat similarly to the corresponding advance coefficients in puller configurations, except the values were smaller in magnitude. The unit thrust decreased for azimuthing from 0 to 30° in both directions as compared to that in straight course conditions. However, a small increase unit thrust coefficient was seen as the propulsor azimuths from 0 to 15° port side. The similar nature was seen for most of the advance coefficient values. The reduction of the longitudinal force was stronger for the negative azimuth direction, i.e. for right hand propeller, the counter-clockwise azimuth direction (in the present case, the -10°, -20° and -30° azimuth conditions, see Figure 20a).

As shown in Figure 16, for all the advance coefficients, the propeller torque coefficients were higher than those of the straight course conditions for positive azimuth angles and were lower for negative (starboard) azimuth angles. It is shown that for pusher configurations, the maximum torque was

found at 30° azimuth angle in the port side and the lowest torque was found at -30° azimuth angle in the starboard side. It was also observed that the propeller torque was less sensitive to the azimuthing angle (in the range of -30° to 30°) in the starboard side than in the port side. In pusher configurations, the highest unit efficiency was seen at straight course operating conditions and the lowest was seen at 30° starboard azimuthing conditions (Figure 17) when the advance coefficient was higher than 0.5.

Figures 18 and 20(c) show the change of transverse force coefficients with advance coefficient and azimuth angles (at different fixed J_s). The nature and magnitude of the transverse force coefficient with the change of advance coefficient and azimuthing conditions were somewhat similar to those in puller configurations. The zero transverse force was found in the range of azimuth angles from 1° to 3° (clockwise azimuth) for all of the advance coefficients. The steering moment (vertical moment about z -axis) showed an increasing tendency with the increase of advance coefficients for positive azimuthing angles and a decreasing tendency with the increase of advance coefficients for negative azimuthing angles with a steady behavior for straight course conditions. The nature of the steering moment coefficient curves was completely different from those in the puller configurations.

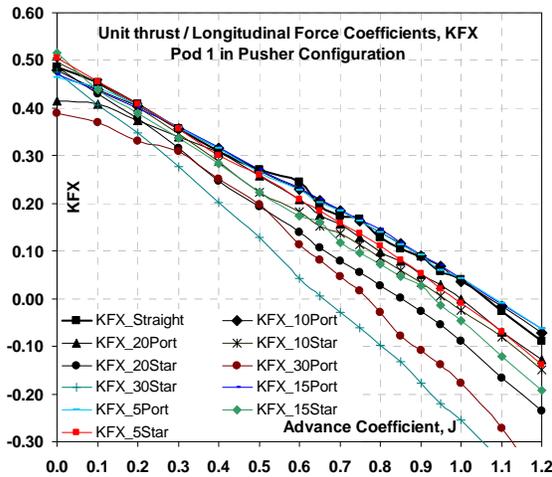


Figure 15. Longitudinal force coefficient plots for Pod 1 at different azimuth conditions.

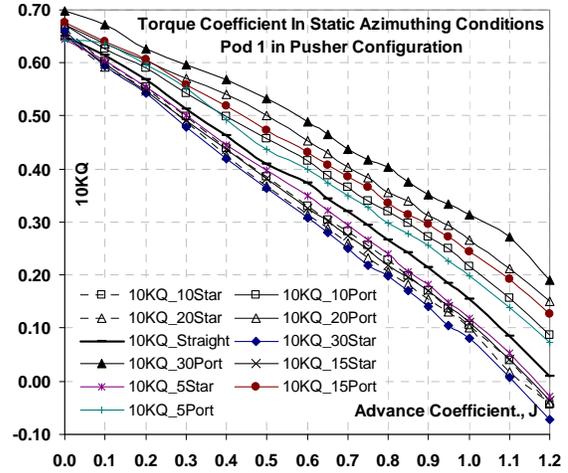


Figure 16. Propeller torque coefficient for Pod 1 unit at different azimuth conditions.

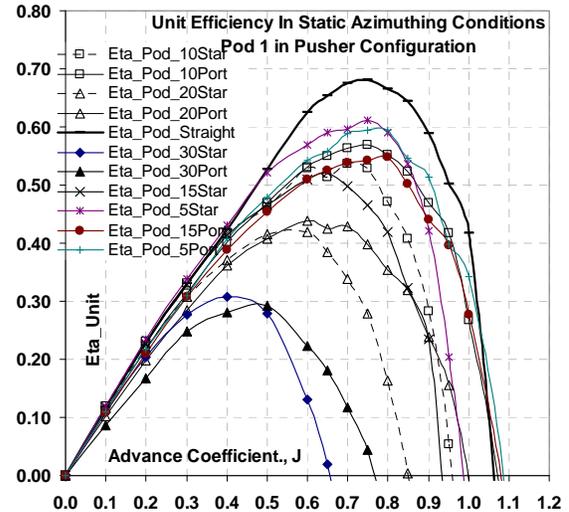


Figure 17. Unit efficiency plots for Pod 1 at different azimuth conditions.

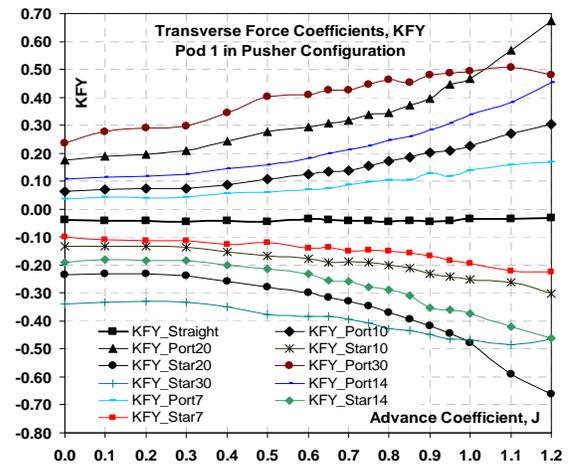


Figure 18. Transverse force coefficient plots for Pod 1 at different azimuth conditions.

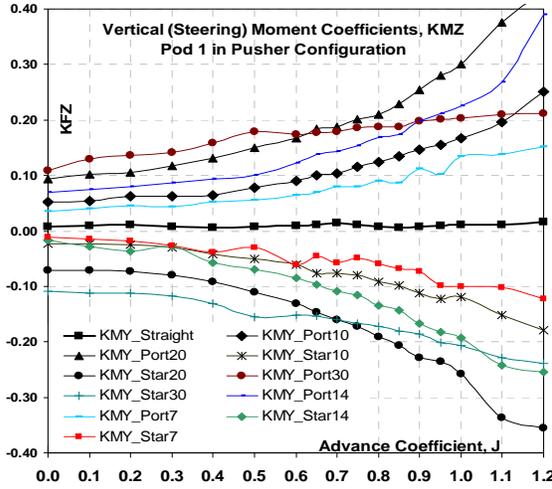


Figure 19. Vertical (steering) moment coefficient plots for Pod 1 at different azimuth conditions

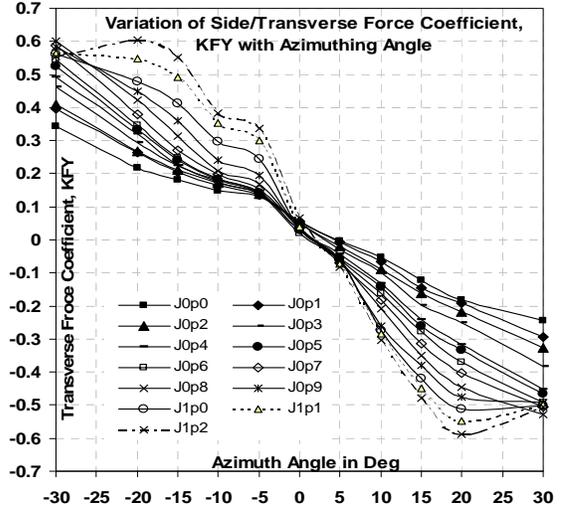


Figure 20(c). Transverse / Side force coefficient

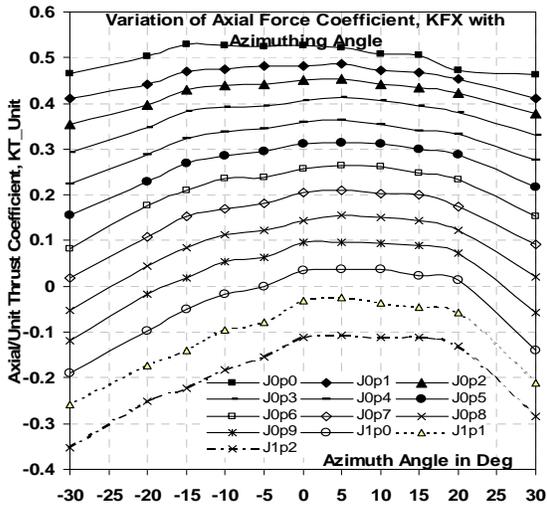


Figure 20(a). Unit thrust / Longitudinal force coefficient

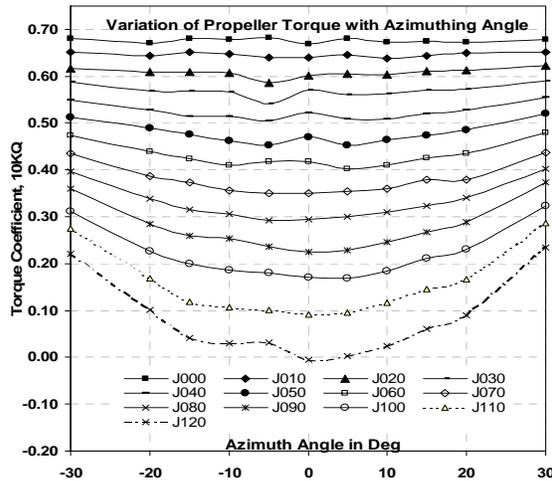


Figure 20(b). Propeller torque coefficient

4. CONCLUSION

The present set of experiments investigated the effects of azimuthing conditions on the propulsive performance of podded propulsors in puller and pusher configurations. A model pod fitted with two propellers (for the two configurations) was tested using a custom designed pod testing system.

The unit force and moment coefficients of the propulsors showed a strong dependence on the propeller advance coefficient, azimuth angle and directions. Both in puller and pusher configurations, the unit thrust coefficient decreased with increasing advance coefficient and for both azimuth directions ($\pm 30^\circ$). In both configurations, the reduction of the unit thrust was stronger for the negative azimuth direction. In puller configurations, the maximum unit efficiency was found in 5° portside azimuthing conditions whereas in pusher configuration, the maximum unit efficiency was found in straight course operating conditions at advance coefficient values greater than 0.5.

Both in puller and pusher configurations, the propulsor with positive azimuth angles shows an increasing transverse force with the increase of J and the propulsor with negative azimuth angles shows a decreasing transverse force with the increase of J . In puller configuration, the zero transverse force was found in the range of azimuth angle from 2° to 5° in port side, whereas in pusher configuration, the zero transverse force was found in the range of azimuth angle from 1° to 3° in port side, for all of the advance coefficients.

In puller configuration, the steering moment (vertical moment about z -axis) showed a decreasing tendency

with the increase of advance coefficients for positive azimuthing angles and an increasing tendency with the increase of advance coefficients for negative azimuthing angles with a steady behavior for straight course conditions. However, in pusher configuration, the steering moment showed an increasing tendency with the increase of advance coefficients for positive azimuthing angles and a decreasing tendency with the increase of advance coefficients for negative azimuthing angles with a steady behavior for straight course conditions. The nature of the steering moment coefficient curves was completely different than those in the puller configurations.

ACKNOWLEDGEMENTS

The authors thank the Natural Sciences and Engineering Research Council (NSERC) Canada, the National Research Council (NRC), Oceanic Consulting Corp., Thordon Bearings Inc., and Memorial University for their financial and other support. Special thanks to Andrew MacNeill of Oceanic Consulting Corp. for designing the dynamometer system and helping with the set-up. Thanks are also extended to Jim Gosse and other technical service staff of Memorial University.

REFERENCES

- [1] Pakaste, R., Laukia, K., Wilhelmson, M., "Experience with Azipod® Propulsion Systems on Board Marine Vessels", *ABB Review*, Issue 2, 12p, 1999.
- [2] Islam M. F., "Numerical Investigation on Effects of Hub Taper Angle and Pod-Strut Geometry on Propulsive Performance of Pusher Propeller Configurations", Master of Engineering thesis, Memorial University of Newfoundland, Canada, 136 p., 2004.
- [3] Islam, M. F., Taylor, R., Quinton, J., Veitch, B., Bose, N., Colbourne, B. And Liu, P., "Numerical investigation of propulsive characteristics of podded propeller", Proceedings of the 1st International Conference on Technological Advances in Podded Propulsion, Newcastle University, UK, April, pp. 513-525, 2004.
- [4] Islam, M. Veitch, B., Bose, N. And Liu, P., "Cavitation Characteristics of Pushing and Pulling Podded Propellers With Different Hub Taper Angles", Proceedings. of the 7th CMHSC, Halifax, NS Canada, September 21-22, 7p., 2005.
- [5] Islam, M. Veitch, B., Bose, N. And Liu, P., "Numerical Study of Hub Taper Angle on Podded Propeller Performance", *Journal of Marine Technology*, Vo. 43, No.1, pp.1-10., 2006.
- [6] Taylor, R. Veitch, B., Bose, N., "The Influence of Hub Taper Angle on Podded Propeller Performance: 'Propeller Only' Tests vs. 'Podded Propeller Unit' Tests", Proceedings of the 7th CMHSC, Halifax, NS Canada, September 21-22, 8p., 2005.
- [7] Taylor, R., "Experimental Investigation of the Influence of Hub Taper Angle on the Performance of Push and Pull Configuration Podded Propellers", Master's of Engineering Thesis, Memorial University of Newfoundland, Canada, 120p., 2005.
- [8] He, M., Veitch, B., Bose, N., Bruce, C. And Liu, P., "Numerical Simulations of Propeller Wake Impacting on a Strut", Proceedings of the CFD2005, St John's, NL Canada, August, 8p., 2005a
- [9] He, M., Veitch, B., Bose, N. And Liu, P., "An Investigation on Wake/Strut Interaction of a Tractor-Type Podded Propulsor", Proceedings of the 7th CMHSC, Halifax, NS Canada, September 21-22, 8p., 2005b.
- [10] MacNeill, A., Taylor, R., Molloy, S., Bose, N., Veitch, B., Randell, T. And Liu, P., "Design of Model Pod Test Unit", Proceedings of the 1st International Conference on Technological Advances in Podded Propulsion, Newcastle University, UK, April, pp. 447-458., 2004.
- [11] Molloy, S., Islam, M. F., He. M., Veitch, B., Bose, N., Wang, J., Akinturk, A. And Liu, P., "Use of Factorial Design in Podded Propulsors Geometric Series", Proceedings of the 7th CMHSC, Halifax, NS Canada, September 21-22, 8 p., 2005.
- [12] Islam M. F., Molloy S., He M., Veitch B., Bose N. and Liu P. "2006 Hydrodynamic Study of Podded Propulsors with Systematically Varied Geometry " Proceedings, TPOD 2006, Brest, France, 14p, October 2006.
- [13] Mohammed F. Islam, Brian Veitch, Susan Molloy, Neil Bose, and Pengfei Liu "Effects of Geometry Variations on the Performance of Podded Propulsors" To be appeared in SNAME Trans, Florida, USA, 17p, November 2007.
- [14] Szantyr, J.A., "Hydrodynamic Model Experiments with Pod Propulsor", International Symposium of Ship Propulsion (Lavrentiev Lectures), State Marine Technical University, St. Petersburg, Russia, pp. 95-104., 2001a.
- [15] Szantyr, J.A., "Hydrodynamic Model Experiments with Pod Propulsor", *Oceanic Engineering International*, Vol. 5, No.2, pp. 95-103., 2001b.
- [16] Grygorowicz, M. And Szantyr, J.A., "Open Water Experiments with Two Pods Propulsor Models", In Proc. of the 1st International

- Conference on Technological Advances in Podded Propulsion, Newcastle University, UK, April, pp. 357-370., 2004.
- [17] Heinke, H.J., “Investigation About The Forces And Moments At Podded Drives”, In Proc. of the 1st International Conference on Technological Advances in Podded Propulsion, Newcastle University, UK, April, pp. 305-320., 2004.
- [18] STETTLER, J.W. HOVER, F.S. And TRIANTAFYLLOU, M.S., “Preliminary Results of Testing on the Dynamics of an Azimuth Podded Propulsor Relating to Vehicle Maneuvering”, In Proc. of the 1st International Conference on Technological Advances in Podded Propulsion, University of Newcastle, UK, pp. 321-338., 2004.
- [19] Carlton, J.S., “Podded Propulsors: some design and service experience”, The Motor Ship Marine Propulsion Conference, Copenhagen, Denmark, April 9-10, 7p., 2002.
- [20] Liu, P., “The Design of a Podded Propeller Base Model Geometry and Prediction of its Hydrodynamics”, Technical Report no. TR-2006-16, Institute for Ocean Technology, National Research Council, Canada, 16p., 2006.
- [21] ITTC – Recommended Procedures, (2002), “Propulsion, Performance - Podded Propeller Tests and Extrapolation”, 7.5-02-03-01.3, Revision 00.
- [22] Mewis, F., “The efficiency of pod propulsion”, HADMAR 2001, Bulgaria, October, 7p., 2001.
- [23] Hess, D.E., Nigon, R.T., Bedel, J.W., “Dynamometer Calibration and Usage”, Research and Development Report No. NSWCCD-50-TR-2000/040, Hydromechanics Directorate, Carderrock Division, Naval Surface Warfare Center, West Bethesda, Maryland, 31p., 2000.
- [24] Galway, R. D., “A Comparison of Methods for Calibration and Use of Multi-Component Strain Gauge Wind Tunnel Balances”, Aeronautical Report LR-600, NRC No. 18227, National Aeronautical Establishment, National Research Council, Canada, 40p., 1980.
- [25] Taylor, R. Veitch, B., Bose, N., “Uncertainty analysis in podded propeller open water tests”, Proceedings of the 8th CMHSC, St. John’s, NL Canada, October 16-17, 8p., 2007
- [26] Islam, M. F., “Uncertainty analysis of NSERC-NRC pod dynamometer system.” Ocean Engineering Research Center (OERC) Report No. OERC-2006-05, St. John’s, NL, Canada, 96p, 2006.